
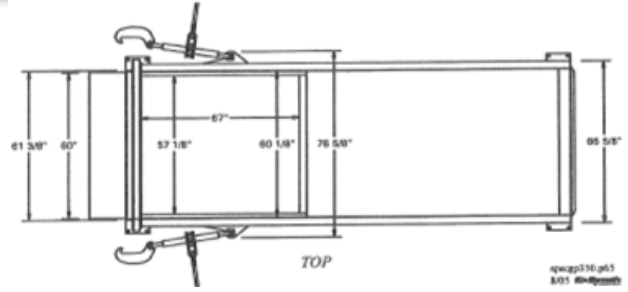


STATIONARY COMPACTORS

350, 350HD & 350 HDT

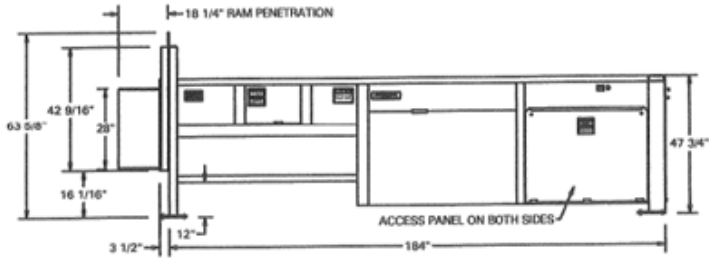

Standard Features

- 1/2" AR Plate ram floor
- 51 second cycle time
- Heavy duty breaker bar is 5" x 3" x 3/8" angled steel
- Full container light
- Low temperature oil
- Multi-cycle timer
- Operational / service manual
- NEMA 4 control panel protects against windblown dust, splashing water, and hose-directed water
- Primed and painted in several colors

Optional Features

- Advance warning light
- Pressure gauge - color coded
- Guide rails
- Oil heater
- Photo electric eye
- Odor control system
- Cart dumper
- Biodegradable oil
- Steel / Chutes / Hoppers



Replacement parts available online at www.gotoparts.com

Specifications

	350	350HD*	350HDT*	
Charge Box	Wastequip rating	3.5 cu. yards		
	Wastec rating	2.54 cu. yards		
	Clear top opening	67" L x 57" W		
	Compactor weight with power unit	6,400 lbs.	7,900 lbs.	8,490 lbs.
Ram	Ram height	28"		
	Ram penetration	18"		
	Face plate	1/2"	3/4"	
	Base plate	1/4"	3/8"	
	Top plate	1/4"	3/8"	
	Side plates	1/4"	3/8"	
Compactor Head	Floor	1/2" AR plate	3/4" AR plate	
	Sides	1/4" plate	3/8" plate	
	Breaker Bar	5" x 3" x 3" x 8" structural steel with 6" x 4" x 1/2" tube stiffener		
	Top deck	12-gauge		
	Electrical	Electric motor, fan cooled	15 HP	
Voltage		208/230/460, 3-phase 60 Hz		
Power Box		UL rated, TEFC housing		
Automated cycle operation		Turn-key switch, ram extends, retracts, and stops automatically		
Hydraulic Performance	Pump	13.0 GPM		
	Pump type	Regen		
	Hydraulic oil tank	39 gallon reservoir		
	Cylinder bore/rod/stroke	6" bore, 4.5" rod, 90" stroke		(2) 6" bore, 4.5" rod, 90" stroke
	Normal ram face pressure	55,100 lbs.	75,000 lbs.	110,200 lbs.
	Max ram face pressure	63,600 lbs.	86,500 lbs.	127,200 lbs.
	Normal ram psi	32.80 psi	44.60 psi	65.6 psi
	Maximum ram psi	37.90 psi	51.50 psi	75.7 psi
	Cubic yards per hour	180	132	90
	Power unit location	External w/ weather cover		
Cycle time	51 seconds	69.2 seconds	101.7 seconds	

*Specifications are the same as the 350 unless otherwise indicated.

Standard Color Choices



Colors shown are as accurate as printing allows. The actual color is subject to variation from the printed color sample. Color choices vary by plant location. Please contact your local sales representative for available colors. Custom colors are available upon request and are subject to an additional charge.

877.468.9278
sales@wastequip.com
www.wastequip.com

WQP104-062015

